


Front Direction Indicator Lamp *

- 5 Insert bulb holder in lamp assembly, rotate clockwise until fully secure.
- 6 Reconnect the battery negative terminal.
- 7 Test lamp operation.
- 8 Close the bonnet.

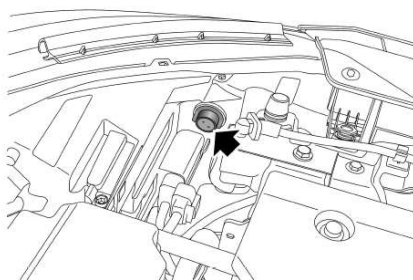

4 Fit new bulb to bulb holder.

279